




# 鋁電解電容器

Aluminum Electorlytic Capacitor

## VYZ Series 片式铝电解电容器 150°C耐高温品

Higher Temperature 150°C Aluminum Electorlytic Capacitor of V-chip Type




- 工作温度范围宽(-40°C ~ +150°C) 1000 小时
- 适用于回流焊
- 适用于高密度表面组装
- 适用于汽车电装品的高温度用途。
- 可对应耐振构造产品。
- 符合 AEC-Q200。
- Operating over wide temperature range 1000 hours.
- Reflow soldering is available.
- Suitable for high density surface assembly.
- Suitable for high temperature application of car denso.
- Can be corresponding vibration resistant structure products.
- Compliance with AEC-Q200.

### ■ 主要技术性能 Specifications

使用温度范围 Operating Temperature Range	-40~+150°C								
额定电压范围 Rated Voltage Range	25~35V DC								
标称电容量允许偏差 Capacitance Tolerance	±20% (120Hz, 20°C)								
漏电流 (20°C) Leakage Current	I≤0.03CV( μ A)或3 μ A 取较大者, (2分钟) I≤0.03CV( μ A) or 3 μ A Whichever is greater (after 2 minutes) I=Leakage Current( μ A), C=Capacitance( μ F), V=Rated DC Working Voltage(V)								
损耗角正切值 Dissipation Factor (120Hz 20°C)	WV	25	35						
	tg δ	0.16	0.14						
	0.02 is added to every 1000μF increase over 1000μF								
温度特性 ( 120Hz) Temperature Characteristics Impedance Ratio (120Hz)	WV	25	35						
	Z <sub>-25°C</sub> / Z <sub>+20°C</sub>	2	2						
	Z <sub>-40°C</sub> / Z <sub>+20°C</sub>	4	3						
耐久性 Load Life	+150°C施加额定电压 1000 小时, 恢复 16 小时后, 电容器应满足要求 After applying rated voltage for 2000 hours at +150°C and then resumed 16 hours. The capacitor shall meet the following limits.  <table border="1"> <tbody> <tr> <td>电容量变化率 Capacitance Change</td> <td>≤±30%初始测量值 ≤±30% of Initial measured value</td> </tr> <tr> <td>漏电流值 Leakage</td> <td>≤规定值 ≤The specified value</td> </tr> <tr> <td>损耗角正切值 Dissipation Factor</td> <td>≤3 倍规定值 ≤300% of the specified value</td> </tr> </tbody> </table>			电容量变化率 Capacitance Change	≤±30%初始测量值 ≤±30% of Initial measured value	漏电流值 Leakage	≤规定值 ≤The specified value	损耗角正切值 Dissipation Factor	≤3 倍规定值 ≤300% of the specified value
电容量变化率 Capacitance Change	≤±30%初始测量值 ≤±30% of Initial measured value								
漏电流值 Leakage	≤规定值 ≤The specified value								
损耗角正切值 Dissipation Factor	≤3 倍规定值 ≤300% of the specified value								
高温贮存 Shelf Life (150°C)	试验时间: 1000 小时, 其他项目与耐久性相同。电压应用处理: 根据 JIS C5101-4.1 Test time : 1000hours ; other items are same as the endurance. Voltage application treatment : According to JIS C5101-4 4.1								
额定纹波电流的频率系数 Frequency coefficient of rated ripple current	Frequency Capacitance	120Hz	1KHz	10KHz	100KHz				
	330~560μF	0.50	0.85	0.94	1.00				
	750~1800μF	0.60	0.87	0.95	1.00				
	2400μF	0.75	0.90	0.95	1.00				

## ■ 外形图 Outline Drawing

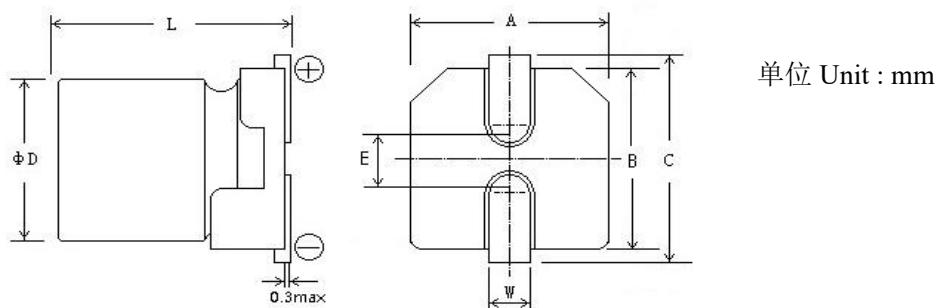

Size	$\phi 12.5 \times 13.5$	$\phi 12.5 \times 16$	$\phi 16 \times 16.5$	$\phi 16 \times 21.5$	$\phi 18 \times 16.5$	$\phi 18 \times 21.5$
A $\pm 0.2$	13.0	13.0	17	17	19	19
B $\pm 0.2$	13.0	13.0	17	17	19	19
E	5.2	5.2	6.5	6.5	6.5	6.5
L $\pm 0.5$	13.5	16	16.5	21.5	16.5	21.5
C $\pm 0.2$	13.8	13.8	18	18	20	20
W	1.1 ~ 1.4					

## ■ 标称电容量、额定电压、额定纹波电流与外形尺寸对应表

Nominal capacitance, rated voltage, rated ripple current and case size table

Cap(μF)	25V			35V		
	ΦD×L (mm)	Z max (Ω)	I (mA)	ΦD×L (mm)	Z max (Ω)	I (mA)
330				12.5×13.5	0.27	670
390				12.5×16	0.21	800
560	12.5×13.5	0.14	860	16×16.5	0.16	920
750	12.5×16	0.11	1000	18×16.5	0.13	1000
910				16×21.5	0.10	1260
1000	16×16.5	0.10	1120			
1200				18×21.5	0.084	1320
1500	18×16.5	0.10	1210			
1800	16×21.5	0.058	1460			
2400	18×21.5	0.058	1560			

I~额定纹波电流 Rated ripple current: (mA, 150°C, 100KHz), Z 阻抗值 Impedance: (Ω, 20°C, 100KHz)