


## RPK Series 引线式导电聚合物固体铝电解电容器耐高温品

Higher Temperature . Conductive Polymer . Radial Lead Type


- 125°C、2000~4000 小时 125°C、2000-4000 hours
- 性能稳定，可靠性高 High stability and reliability
- 低 ESR、耐大纹波电流 Low ESR 、High ripple current capability

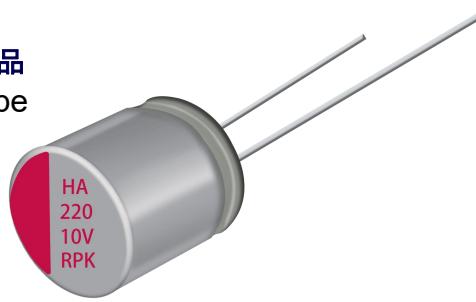

### ■ 主要技术性能 Specifications

项目 Items	主要特性 Performance Characteristics								
使用温度范围 Operating Temperature Range	-55~+125°C								
额定电压范围 Rated Voltage Range	6.3~63V. DC								
标称电容量允许偏差 Capacitance Tolerance	±20% (120Hz, 20°C)								
漏电流(20°C) Leakage Current	施加额定工作电压 2 分钟, $I \leq 0.2 C_{RU} (\mu A)$ After 2 minutes' application of rated voltage, the leakage current is not more than 0.2 $C_{RU}$								
损耗角正切值(120Hz 20°C) Dissipation Factor	测试频率 120Hz/温度 20°C, 损耗小于规范值 Less than the specified value at 120Hz, 20°C								
等效串联电阻 Equivalent Series Resistance	测试频率 100KHz/温度 20°C, 等效串联电阻小于规范值 Less than the specified value at 100KHz, 20°C								
耐久性 Load Life(125°C,2000-4000hrs)	在 125°C 环境施加额定工作电压 2000-4000 小时后 (Φ D6.3:2000 小时), 电容器的特性符合下表要求。 After 2000-4000 hours' (Φ D6.3:2000 hours') application of rated voltage at +125°C, capacitors meet the characteristics requirements listed. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">电容量变化率 Capacitance Change</td><td style="padding: 5px;">初始值的±20%以内 Within ±20% of the initial value</td></tr> <tr> <td style="padding: 5px;">漏电流值 Leakage</td><td style="padding: 5px;">≤ 规范值 Less than the specified value</td></tr> <tr> <td style="padding: 5px;">损耗角正切值 Dissipation Factor</td><td style="padding: 5px;">≤ 规范值的 150% Less than 150% of the specified value</td></tr> <tr> <td style="padding: 5px;">等效串联电阻 Equivalent Series Resistance</td><td style="padding: 5px;">≤ 规范值的 150% Less than 150% of the specified value</td></tr> </table>	电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value	漏电流值 Leakage	≤ 规范值 Less than the specified value	损耗角正切值 Dissipation Factor	≤ 规范值的 150% Less than 150% of the specified value	等效串联电阻 Equivalent Series Resistance	≤ 规范值的 150% Less than 150% of the specified value
电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value								
漏电流值 Leakage	≤ 规范值 Less than the specified value								
损耗角正切值 Dissipation Factor	≤ 规范值的 150% Less than 150% of the specified value								
等效串联电阻 Equivalent Series Resistance	≤ 规范值的 150% Less than 150% of the specified value								
耐湿温特性 Damp heat( Steady state) (60°C,90~95%RH,1000hrs)	在温度为 60°C、湿度为 90~95%RH 的环境中, 1000 小时后, 电容器的特性符合下表要求。 60°C , 90 to 95%RH,1000h, No applied voltage capacitors meet the characteristics requirements listed. <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 5px;">电容量变化率 Capacitance Change</td><td style="padding: 5px;">初始值的±20%以内 Within ±20% of the initial value</td></tr> <tr> <td style="padding: 5px;">漏电流值 Leakage</td><td style="padding: 5px;">≤ 规范值 Less than the specified value</td></tr> <tr> <td style="padding: 5px;">损耗角正切值 Dissipation Factor</td><td style="padding: 5px;">≤ 规范值的 150% Less than 150% of the specified value</td></tr> <tr> <td style="padding: 5px;">等效串联电阻 Equivalent Series Resistance</td><td style="padding: 5px;">≤ 规范值的 150% Less than 150% of the specified value</td></tr> </table>	电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value	漏电流值 Leakage	≤ 规范值 Less than the specified value	损耗角正切值 Dissipation Factor	≤ 规范值的 150% Less than 150% of the specified value	等效串联电阻 Equivalent Series Resistance	≤ 规范值的 150% Less than 150% of the specified value
电容量变化率 Capacitance Change	初始值的±20%以内 Within ±20% of the initial value								
漏电流值 Leakage	≤ 规范值 Less than the specified value								
损耗角正切值 Dissipation Factor	≤ 规范值的 150% Less than 150% of the specified value								
等效串联电阻 Equivalent Series Resistance	≤ 规范值的 150% Less than 150% of the specified value								

### ■ 外形图及尺寸 Case size table

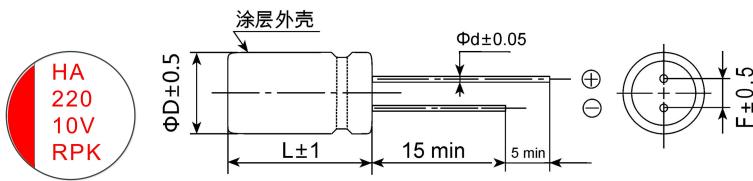

ΦD×L	ΦD	L	F	Φd
5×7	5	5.8	2.0	0.5
5×8	5	8	2.0	0.5
6.3×5	6.3	6	2.5	0.5
6.3×8	6.3	8	2.5	0.5/0.6
8×8	8	8	3.5	0.6
8×12	8	12	3.5	0.6
10×12	10	12	5.0	0.6

## ■ 编码和规格 Part number &amp; Specifications

额定电压 Rated Voltage (V)	标称容量 Capacitance ( $\mu$ F)	产品编码 Part Number	等效串联电阻 ESR( $m\Omega$ max) 100Khz to 300Khz	耐纹波电流 (mA rms/ 105°C, 100Khz)	损耗 $\tan \delta$ (120Hz)	漏电流 (max) ( $\mu$ A)	尺寸 $\Phi D \times L$ (mm)
6.3	220	RPK0J221M0507	20	2610	0.12	277	5×7
	270	RPK0J271M0507	20	2610	0.12	340	5×7
	330	RPK0E331M0606	19	2900	0.12	416	6.3×5
	470	RPK0E471M0608	18	3200	0.12	592	6.3×8
	560	RPK0E561M0608	18	3200	0.12	706	6.3×8
	560	RPK0J561M0808	16	4080	0.12	706	8×8
	680	RPK0J681M0808	16	4080	0.12	857	8×8
	820	RPK0J821M0812	15	4520	0.12	1033	8×12
	1000	RPK0J102M0812	15	4520	0.12	1260	8×12
	1000	RPK0J102M1012	14	4520	0.12	1260	10×12
	1500	RPK0J152M1012	14	4520	0.12	1890	10×12
	100	RPK1A101M0507	20	1970	0.12	200	5×7
10	220	RPK1A221M0608	18	3200	0.12	440	6.3×8
	330	RPK1A331M0608	18	3200	0.12	660	6.3×8
	330	RPK1A331M0808	16	4080	0.12	660	8×8
	470	RPK1A471M0808	16	4080	0.12	940	8×8
	470	RPK1A471M0812	15	4520	0.12	940	8×12
	560	RPK1A561M0812	15	4520	0.12	1120	8×12
	680	RPK1A681M0812	15	4520	0.12	1360	8×12
	820	RPK1A821M0812	15	4520	0.12	1640	8×12
	1000	RPK1A102M0812	15	4520	0.12	2000	8×12
	1000	RPK1A102M1012	14	5100	0.12	2000	10×12
16	100	RPK1C101M0606	25	2610	0.12	320	6.3×5
	100	RPK1C101M0608	18	3200	0.12	320	6.3×8
	150	RPK1C151M0808	16	3500	0.12	704	8×8
	220	RPK1C221M0808	16	3500	0.12	704	8×8
	270	RPK1C271M0808	16	3500	0.12	864	8×8
	330	RPK1C331M0812	15	4520	0.12	1056	8×12
	390	RPK1C331M0812	15	4520	0.12	1248	8×12
	470	RPK1C471M0812	15	4520	0.12	1504	8×12
	470	RPK1C471M1012	14	4720	0.12	1504	10×12
	560	RPK1C561M1012	14	4720	0.12	1792	10×12
25	68	RPK1E680M0608	45	1200	0.12	340	6.3×8
	68	RPK1E680M0808	30	2000	0.12	340	8×8
	82	RPK1E820M0808	28	2000	0.12	410	8×8
	100	RPK1E101M0808	24	2000	0.12	500	8×8
	120	RPK1E101M0812	18	2300	0.12	600	8×12
	180	RPK1E101M0812	18	2300	0.12	900	8×12
	220	RPK1E221M0812	18	2300	0.12	1100	8×12
	270	RPK1E271M0812	18	2300	0.12	1350	8×12
	330	RPK1E331M0812	18	2300	0.12	1650	8×12
	470	RPK1E471M0812	18	2300	0.12	2350	8×12
	470	RPK1E471M1012	16	2880	0.12	2350	10×12
	560	RPK1E561M1012	16	2880	0.12	2800	10×12
	680	RPK1E681M1012	16	2880	0.12	3400	10×12

## RPK Series

## ■ 编码和规格 Part number &amp; Specifications

额定电压 Rated Voltage (V)	标称容量 Capacitance ( $\mu$ F)	产品编码 Part Number	等效串联电阻 ESR( $m\Omega$ max) 100Khz to 300Khz	耐纹波电流 (mA rms/ 105°C, 100Khz)	损耗 $\tan \delta$ (120Hz)	漏电流 (max) ( $\mu$ A)	尺寸 $\Phi D \times L$ (mm)
35	39	RPK1V101M0605	26	2100	0.12	273	6.3×5
	56	RPK1V151M0605	26	2100	0.12	392	6.3×5
	100	RPK1V101M0609	26	2100	0.12	700	6.3×9
	150	RPK1V151M0808	25	2350	0.12	1050	8×8
	180	RPK1V181M0812	23	2890	0.12	1260	8×12
	220	RPK1V221M0812	23	2890	0.12	1540	8×12
	330	RPK1V331M1012	24	3400	0.12	2310	10×12
	390	RPK1V391M1012	24	3400	0.12	2730	10×12
50	22	RPK1H220M0808	35	1800	0.12	220	8×8
	27	RPK1H270M0812	28	2600	0.12	270	8×12
	47	RPK1H471M1012	28	2600	0.12	470	8×12
	120	RPK1H121M0812	28	2600	0.12	1200	8×12
	180	RPK1H181M1012	25	3100	0.12	1800	10×12
	220	RPK1H221M1012	25	3100	0.12	2200	10×12
63	82	RPK1J820M0812	30	2500	0.12	1033	8×12
	100	RPK1J101M1012	25	2900	0.12	1260	10×12
	150	RPK1J151M1012	25	2900	0.12	1890	10×12
	180	RPK1J181M1012	25	2900	0.12	2268	10×12

## ■ 纹波电流频率补偿系数 Frequency coefficient of allowable ripple current

Frequency 频率	120Hz≤f<1KHz	1KHz≤f<10KHz	10KHz≤f<100KHz	100kHz≤f<500kHz
Coefficient 系数	0.05	0.30	0.70	1.00